

TRACKED EXCAVATOR | 245XR

JCB



STAGE V

OPERATING WEIGHT
25,284 – 28,009kg

ENGINE POWER
129kW (173hp)

BUCKET CAPACITY
0.35 – 1.25m³

MINIMUM SWING.

At just 1,720mm, the 245XR has a 40% shorter tailswing than the conventional 220X making it ideal for work in confined urban sites and highways.



UNRESTRICTED WORKING

A reduced front swing makes working in tight spaces easier. The 245XR can work in a radius 1.6m less than the 220X.



MAXIMUM SPACE.

Despite having reduced tail swing, the new 245XR still boasts one of the biggest, most comfortable, quiet and easy to operate cabs on the market.



X
SERIES



BEST OPERATOR ENVIRONMENT

Customer-led control layout, with operator feedback directly contributing to the final design.

EXTREME STRENGTH.

It's taken extensive hydraulic, electrical and structural development and testing to build you a machine that doesn't just look strong, but is strong.



DIESELMAX RELIABILITY

Our fuel efficient 245XR DIESELMAX engines have been tested to 110,000 hours in 70 different machines globally.



STAGE V 

EXTRAORDINARY ATTENTION TO DETAIL.

The 245XR follows the same high quality X Series design ethos and utilises cutting-edge production facilities to bring you not just great excavators, but exceptional ones.



X
SERIES



WORLD-CLASS FINISH

All components are painted in our state-of-the-art facility for a high quality finish.

EXCELLENT CONTROL.

Proven Japanese components deliver precise, efficient control. Customisable electro-proportional controls allow operators to set their preference of speed and control of attachments.



EFFORTLESS WORKING

Selectable Swing Smoothing as standard gives optimum performance in any application.

For added versatility, a dozer blade and TAB boom configuration is also available.



TRACKED EXCAVATOR | 245XR




SPECIFICATION.

MODEL	245XR MONO	245XR TAB
Travel speed (high/low)	5.7 / 3.2 km/h	
Tractive effort	207.5 kN	
Max digging reach*	9,423 mm	9,472 mm
Max digging depth*	6,029 mm	5,619 mm
Machine weight**	25,292 kg	26,003 kg
Max bucket tearout*	148 kN	

*2.4m dipper

**Figures include 1.1m³ bucket 772kg, operator 75kg, full fuel tank and 2.4m dipper, 700mm tracks

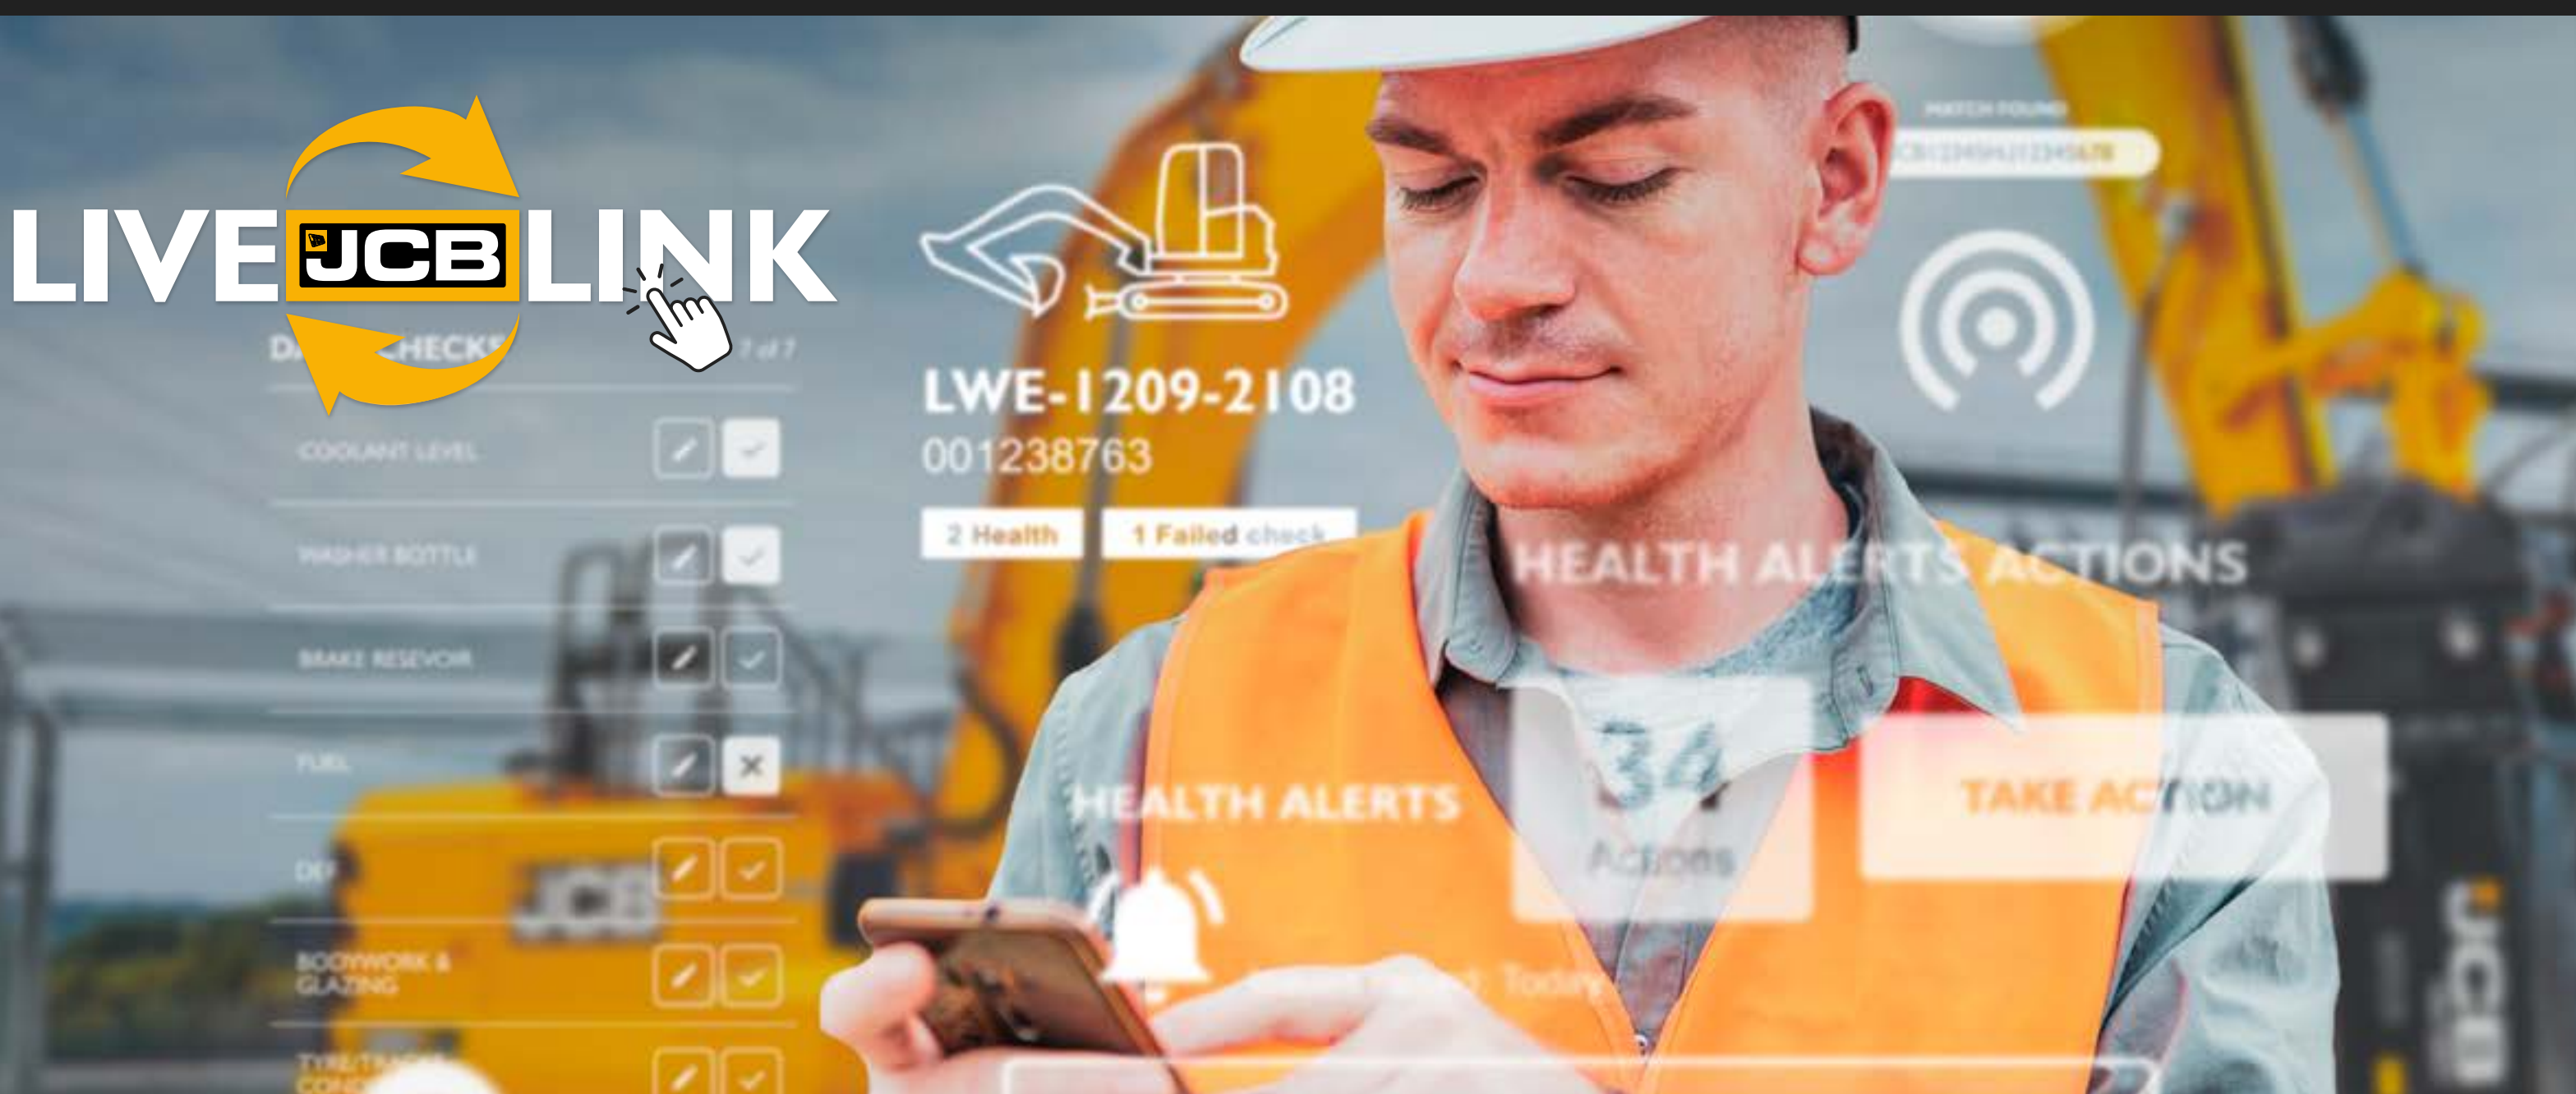

STANDARD FEATURES.

- Side guard rails
- 5 years LiveLink subscription
- 2000 hour engine air filter life
- JCB 448 DIESELMAX StV
- Graphite & bronze bushes
- Factory fitted HBCVs
- Start-stop button
- Fully flat glass cab
- Bluetooth radio
- Seat-mounted control pods



X
SERIES



245XR FIRST DRIVE

UNDERWOOD GROUNDWORK LTD

“The 245XR surpassed my impressions to what I thought it would be... 245X took it to another level”

ANDY UNDERWOOD | UNDERWOOD GROUNDWORK LTD

245XR X-SERIES EXCAVATOR

REQUEST A QUOTE



www.jcb.com

